




# RF

RENOVATION FURNITURE TRADING LLC

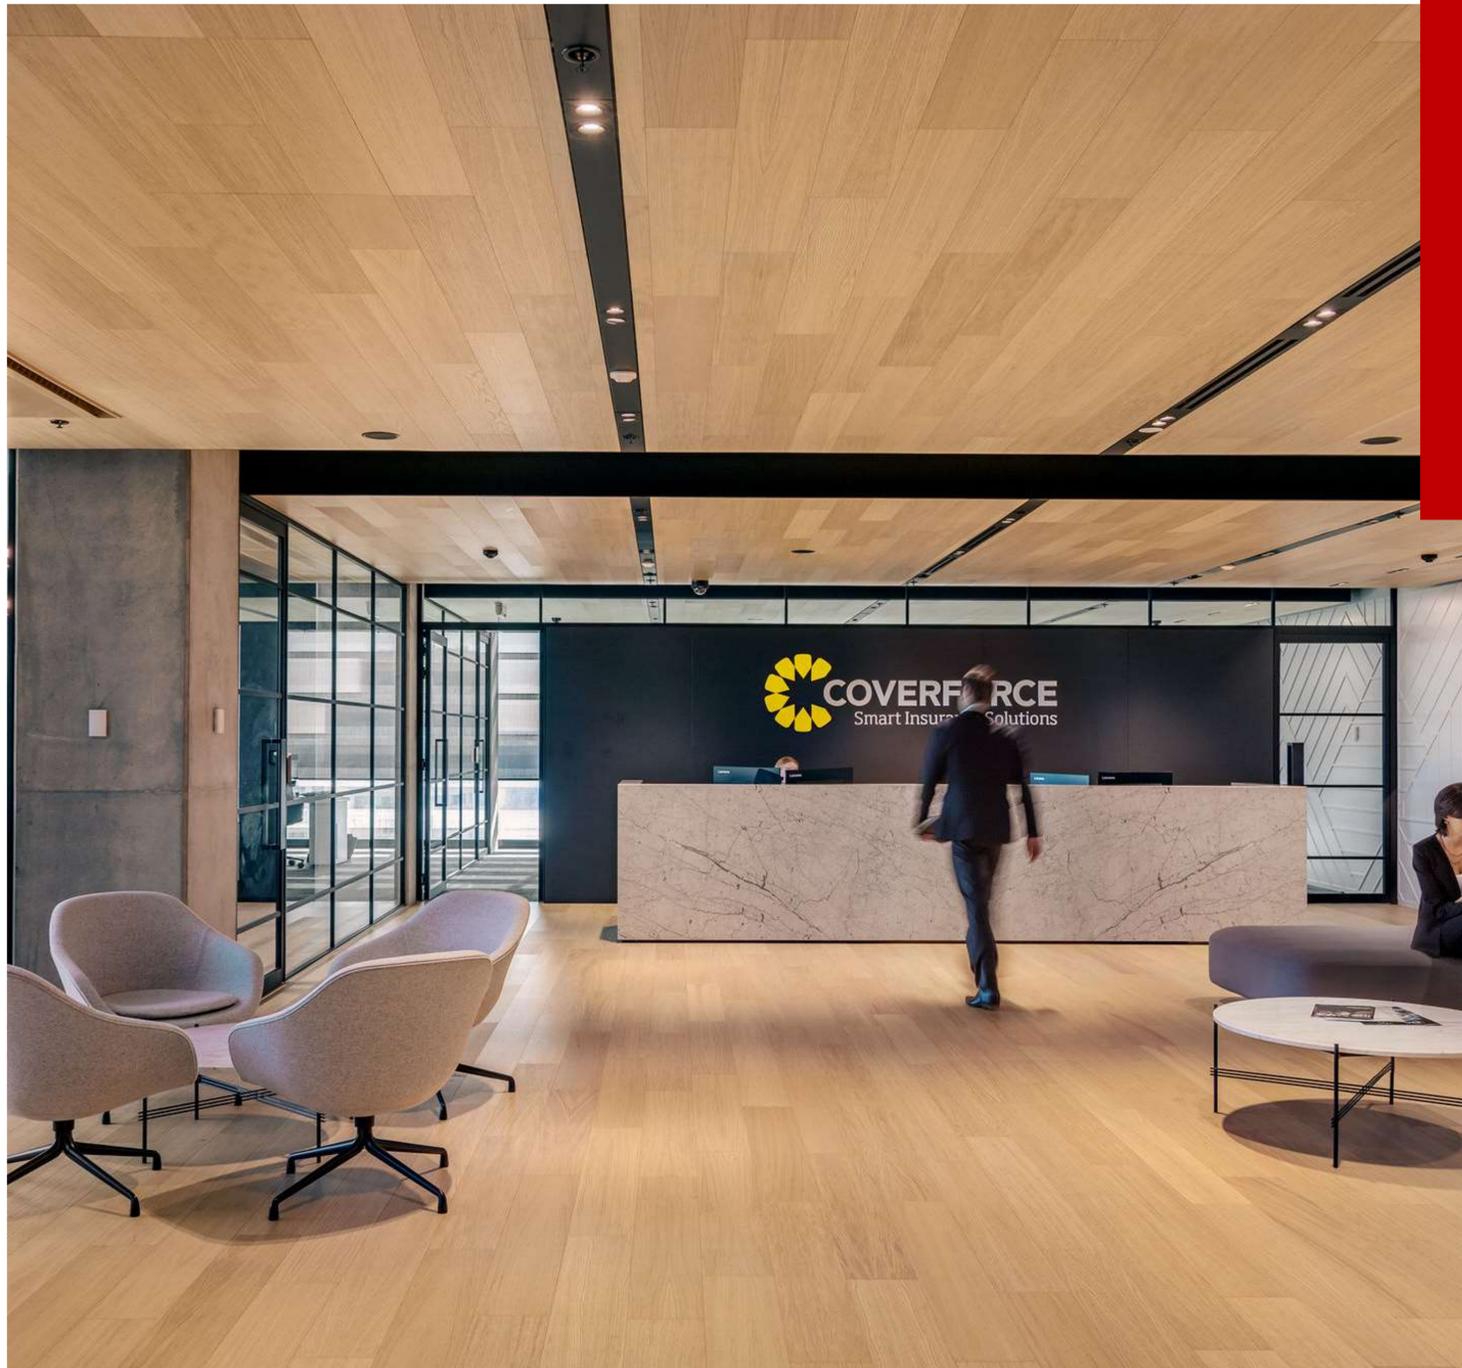

## ENGINEERED TIMBER PARKY


MODERN, CLASSICAL & STYLISH  
FLOOR, WALL & WINDOW TREATMENTS.



## PARKY - DECOSPAN

Parky is a Decospan Group brand, a committed business for over three generations with an insatiable passion for wood. Decospan sees research & development as the key to future growth. Parky is a multi-layer parquet which combines the warmth and unique design of real wood with the technical advantages of rigid board engineered flooring.

# PARKY PRO-06

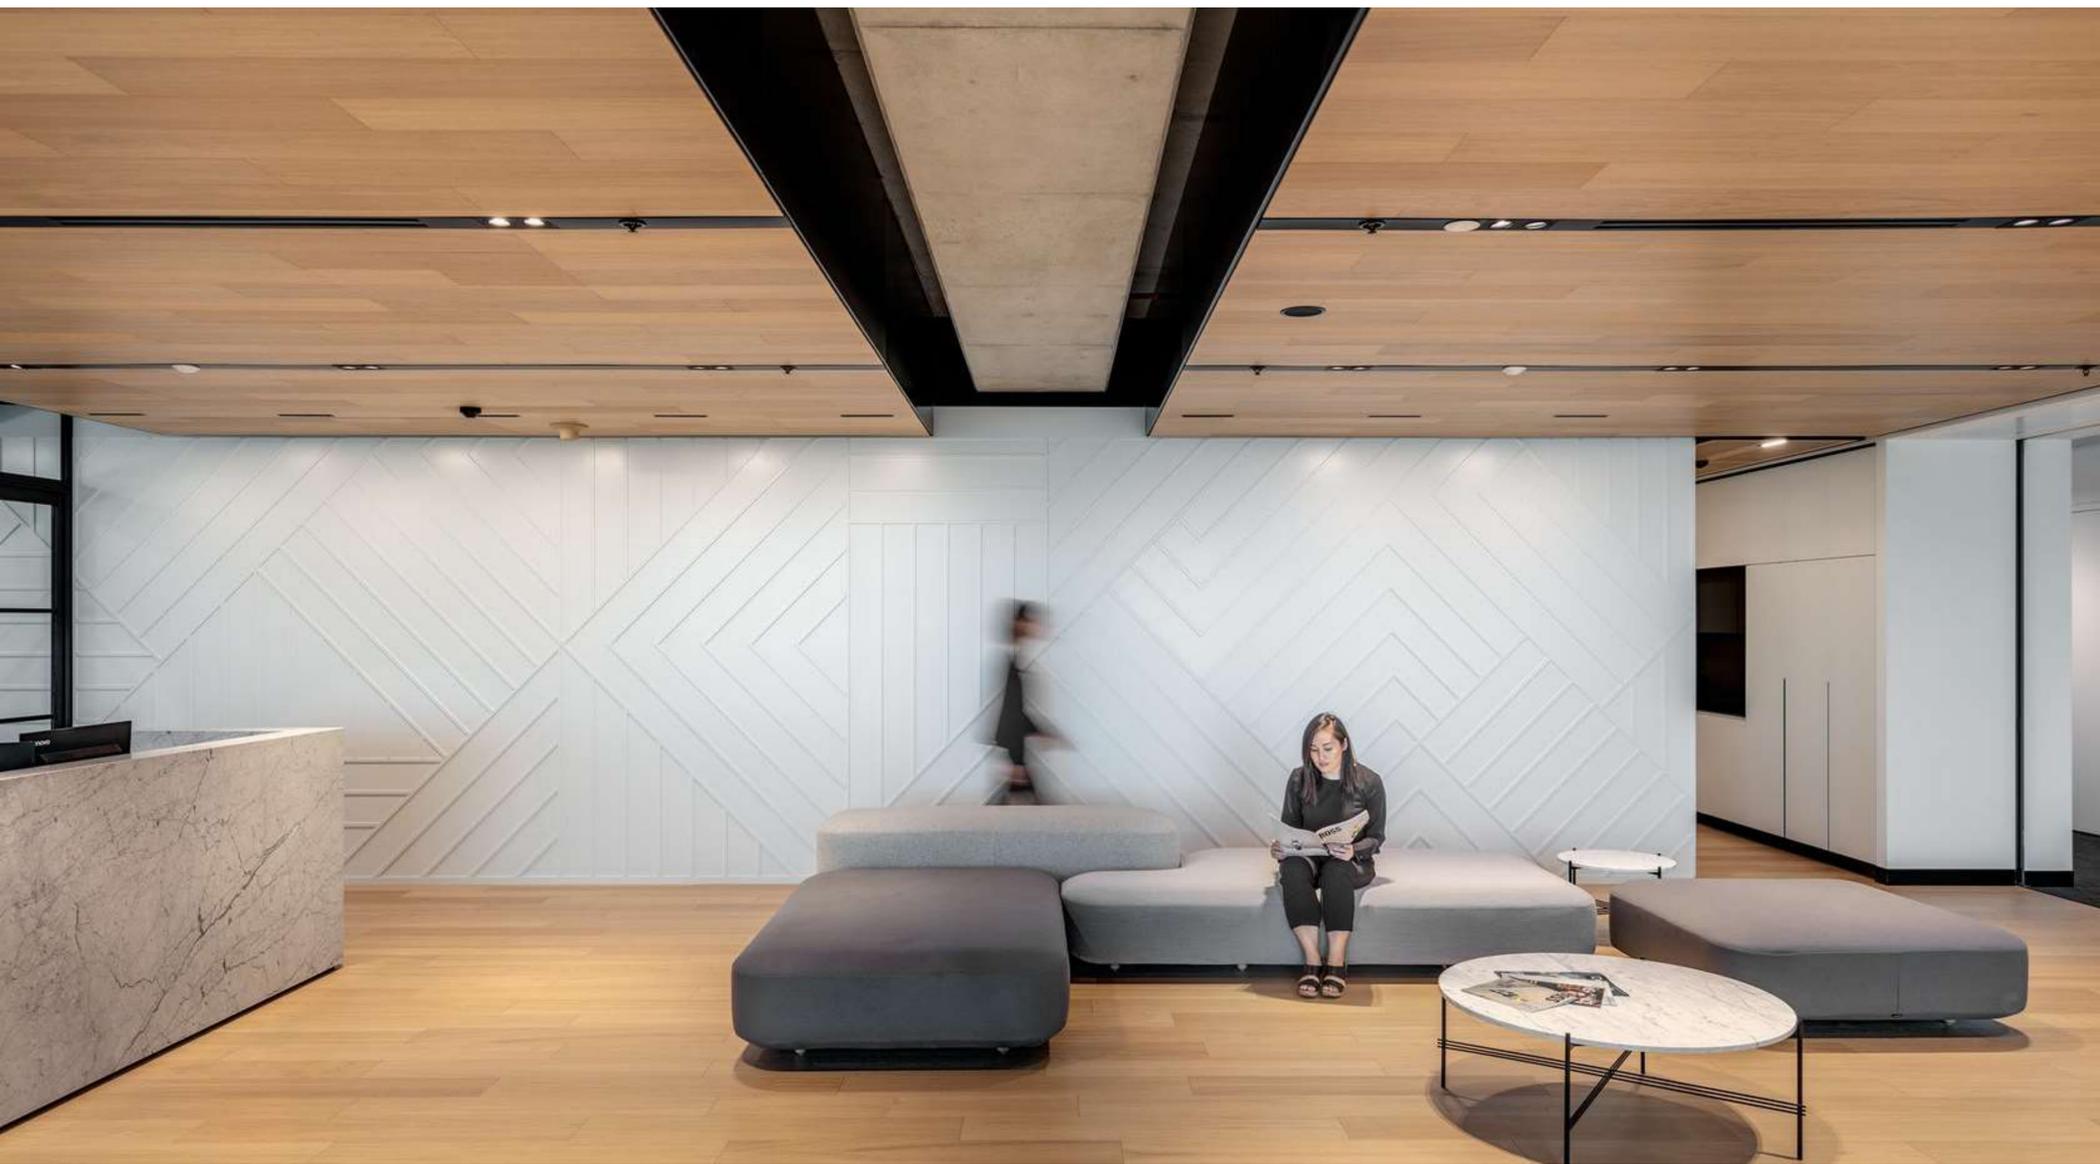

# Parky Pro-06

DESERT OAK – IN STOCK



## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

ESSENCE OAK – IN STOCK




## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

IVORY OAK – IN STOCK

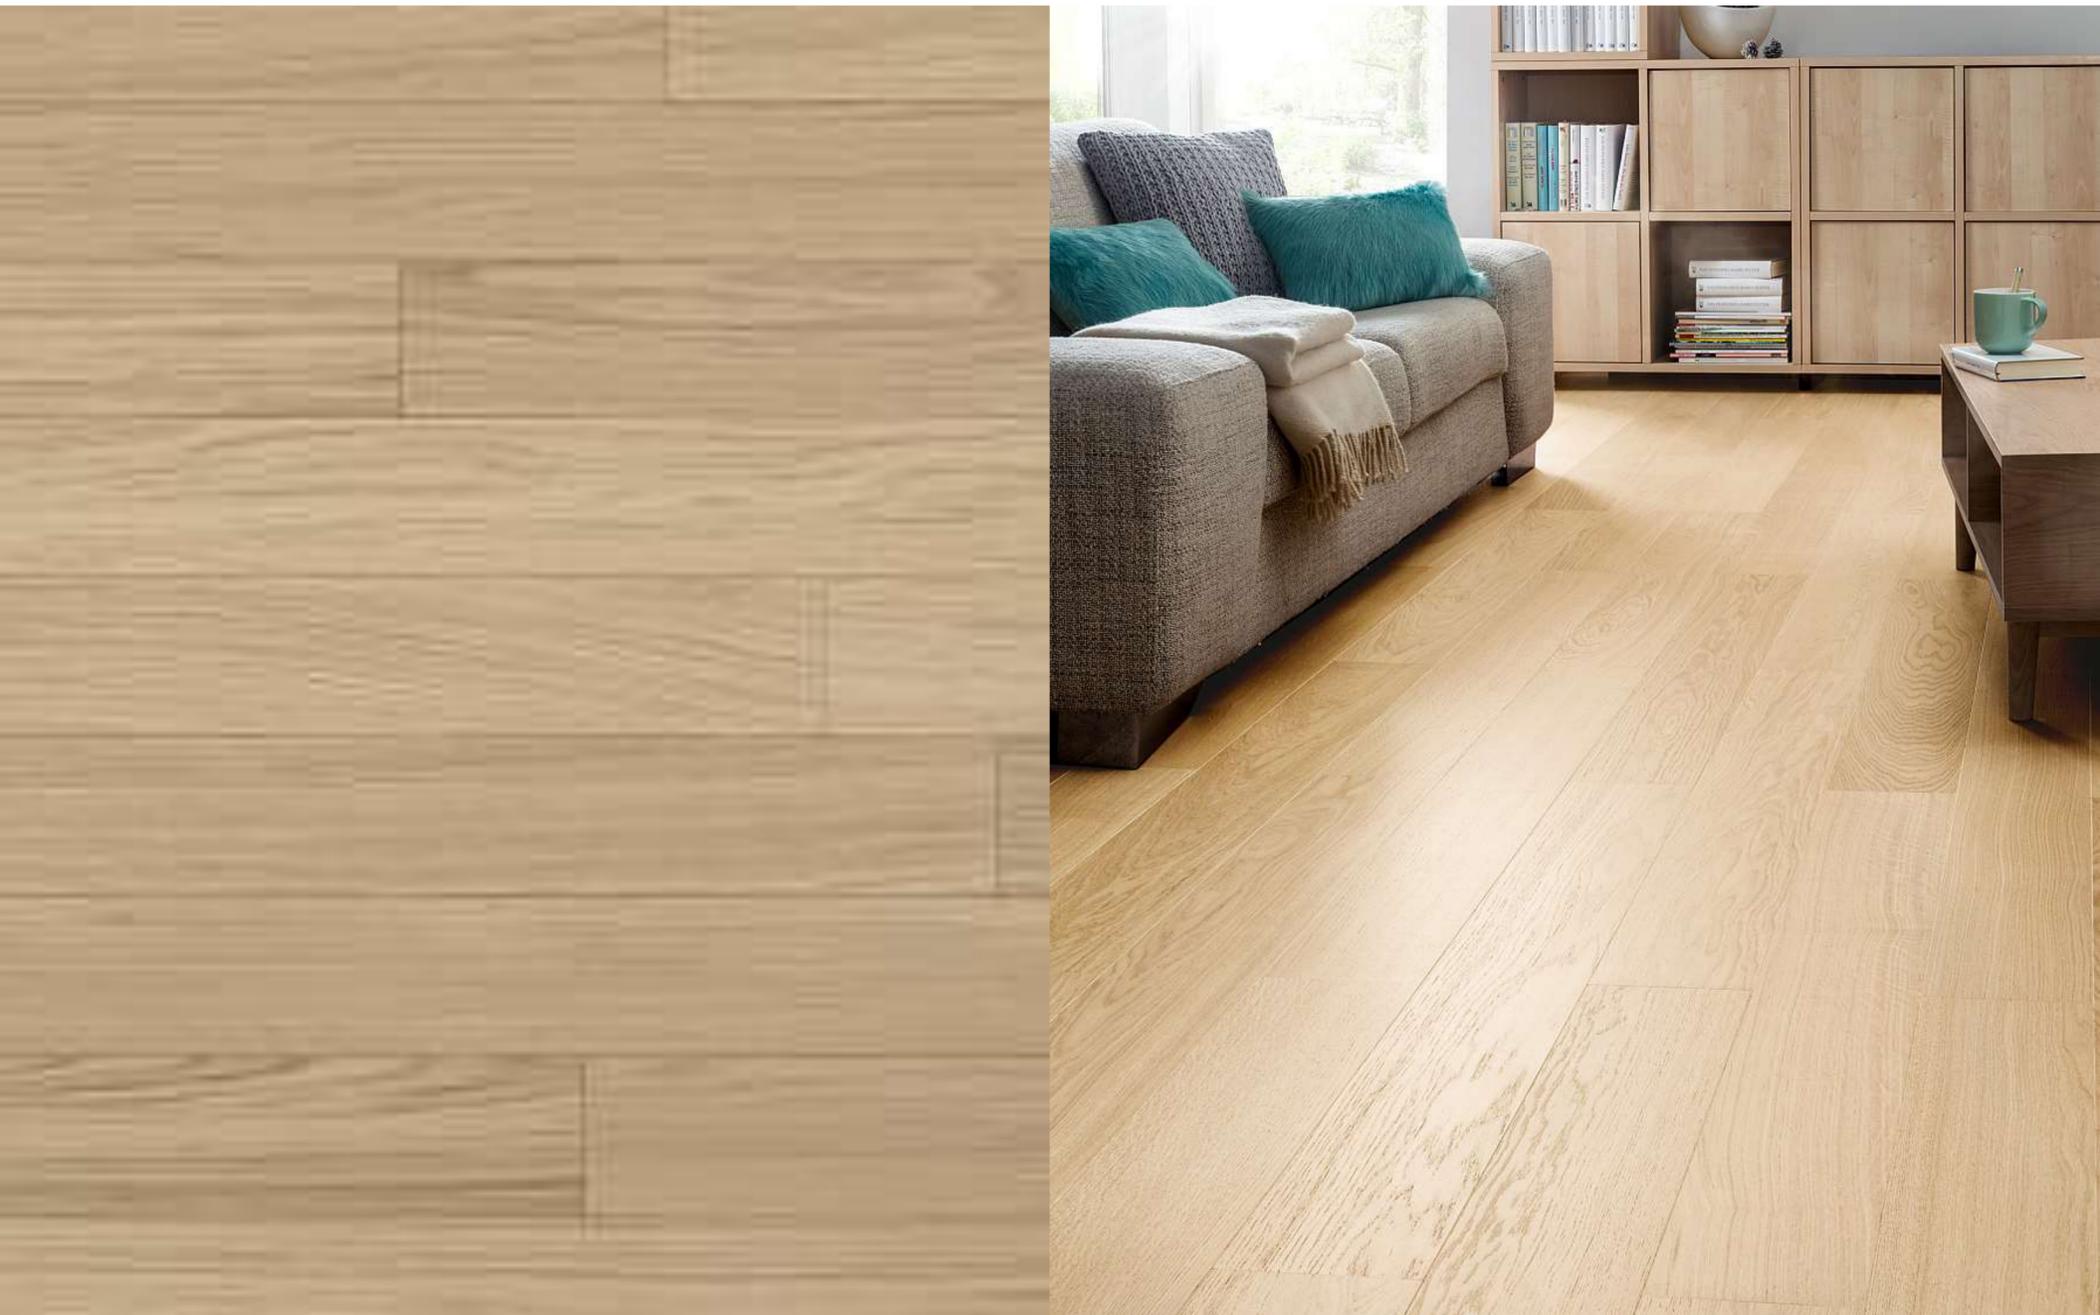

## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

MILK OAK – IN STOCK



## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

SMOKED WALNUT- IN STOCK




## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

CHOCOLATE OAK OAK – ON ORDER

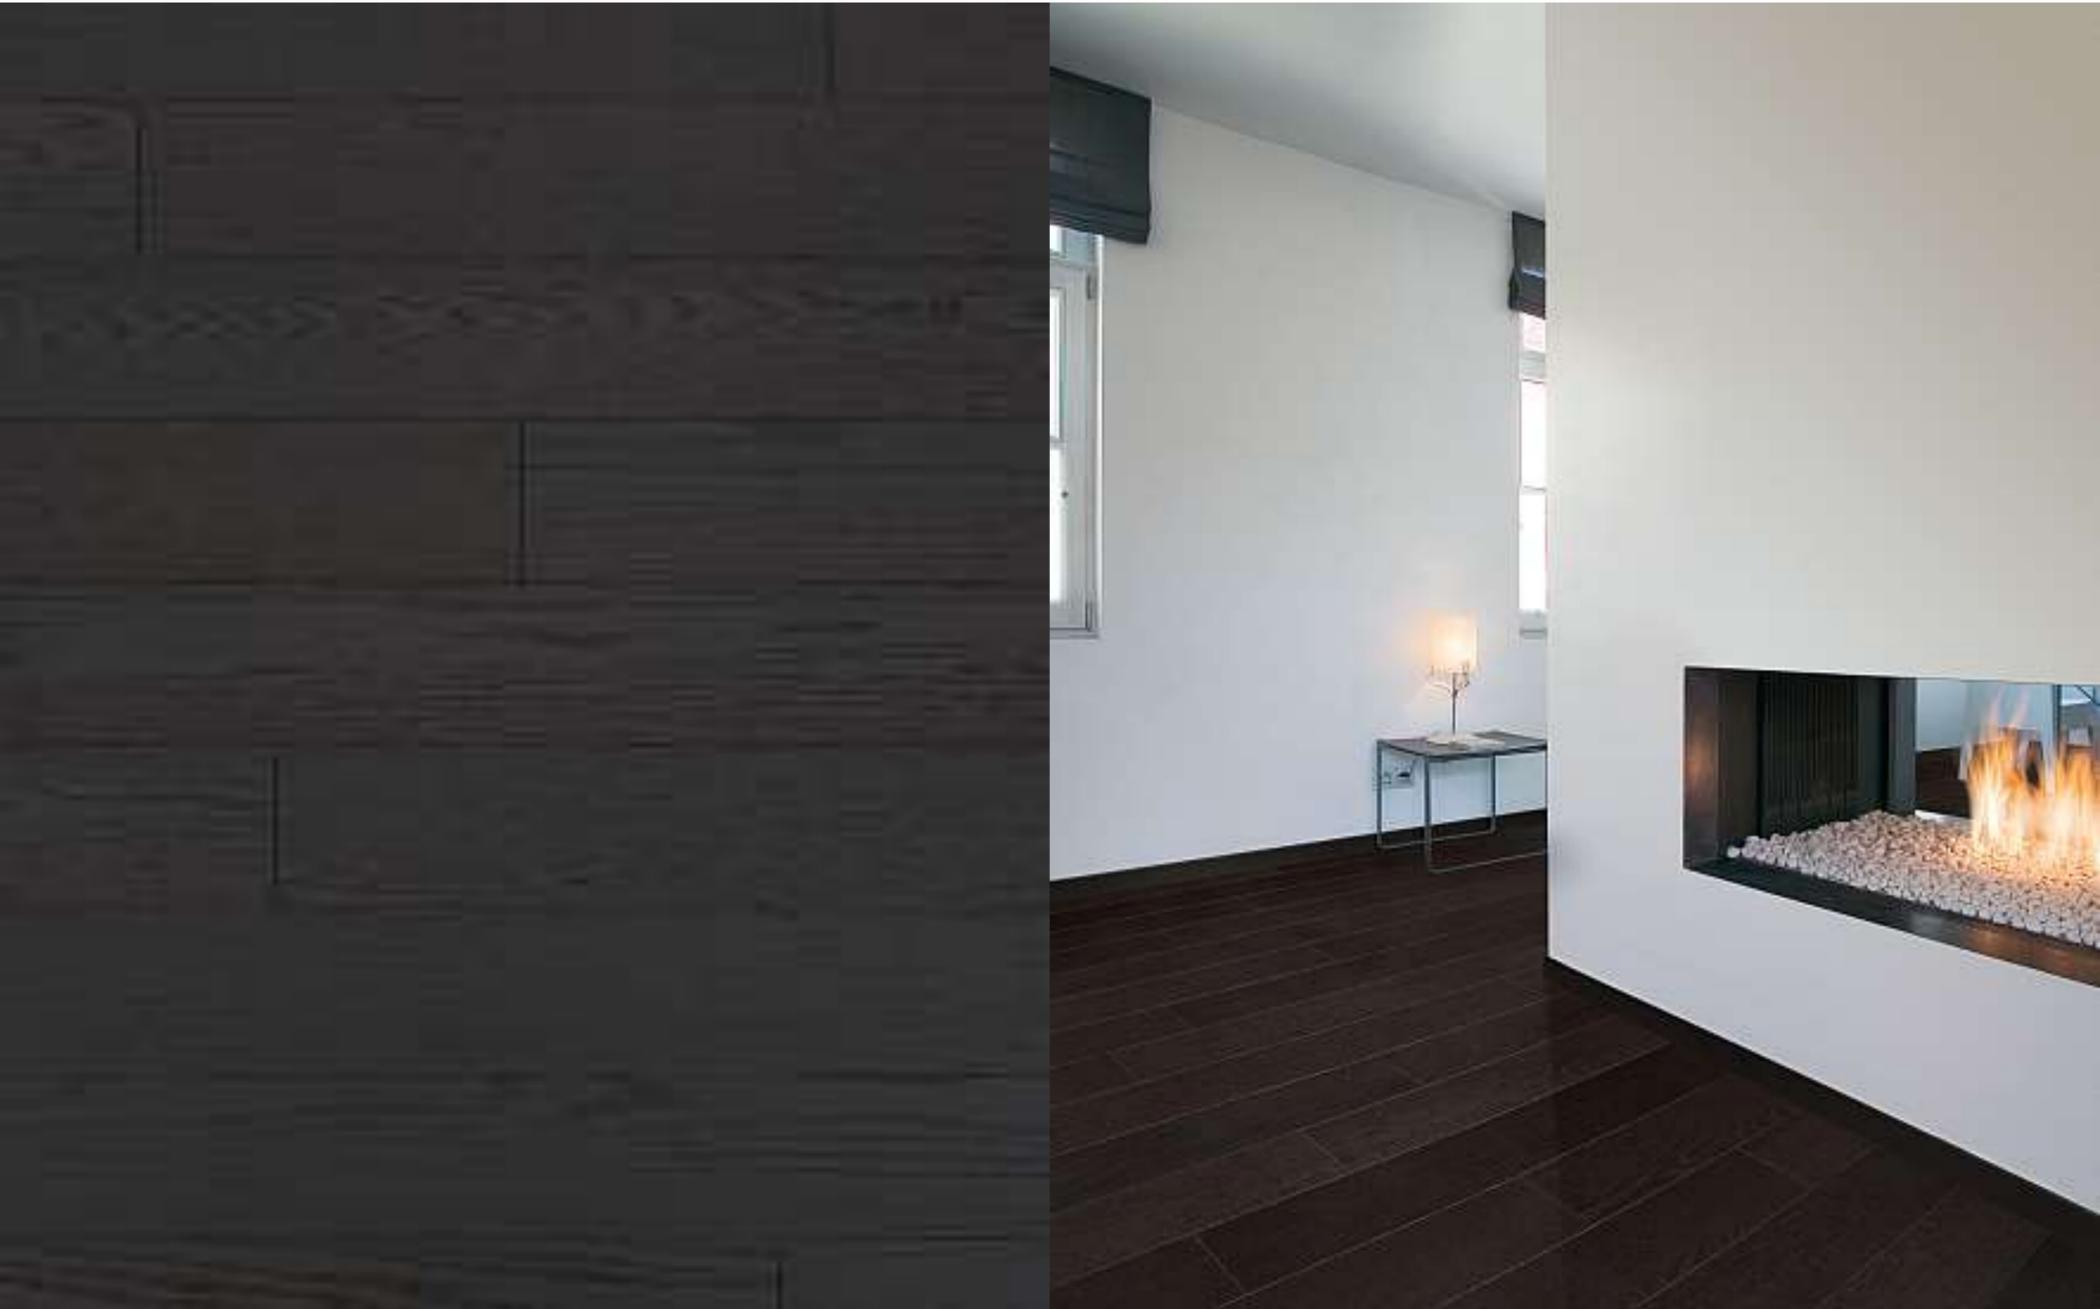

## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

MANHATTAN OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Pro-06

UMBER OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	1203mm
Width:	190mm
Thickness:	7.2mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Uniclic
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# PARKY SWING



# Parky Swing

DESERT OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Swing

EUROPEAN OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Swing



SMOKED WALNUT– ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	593mm
Width:	121mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 31
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# PARKY SUMMIT

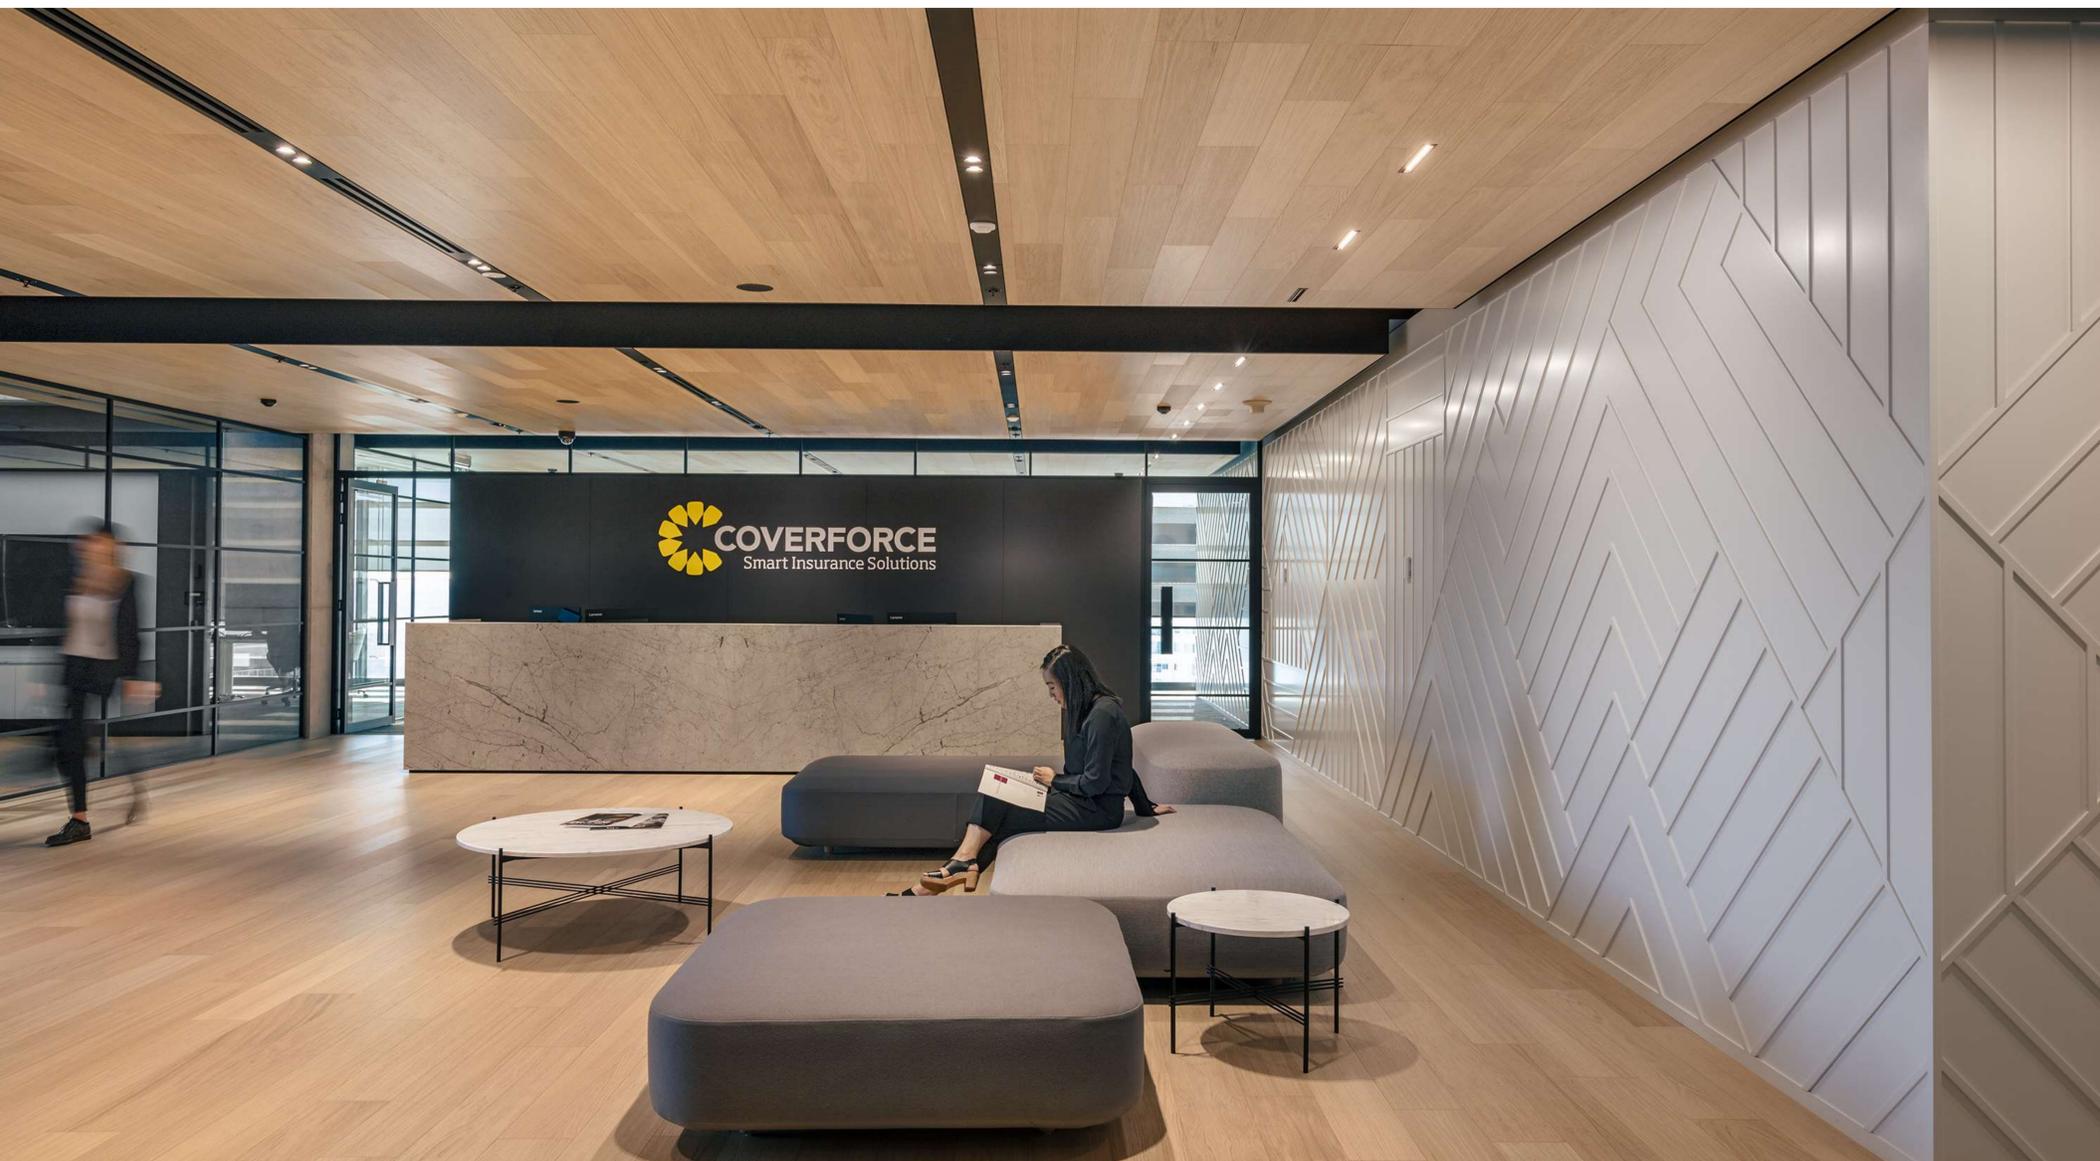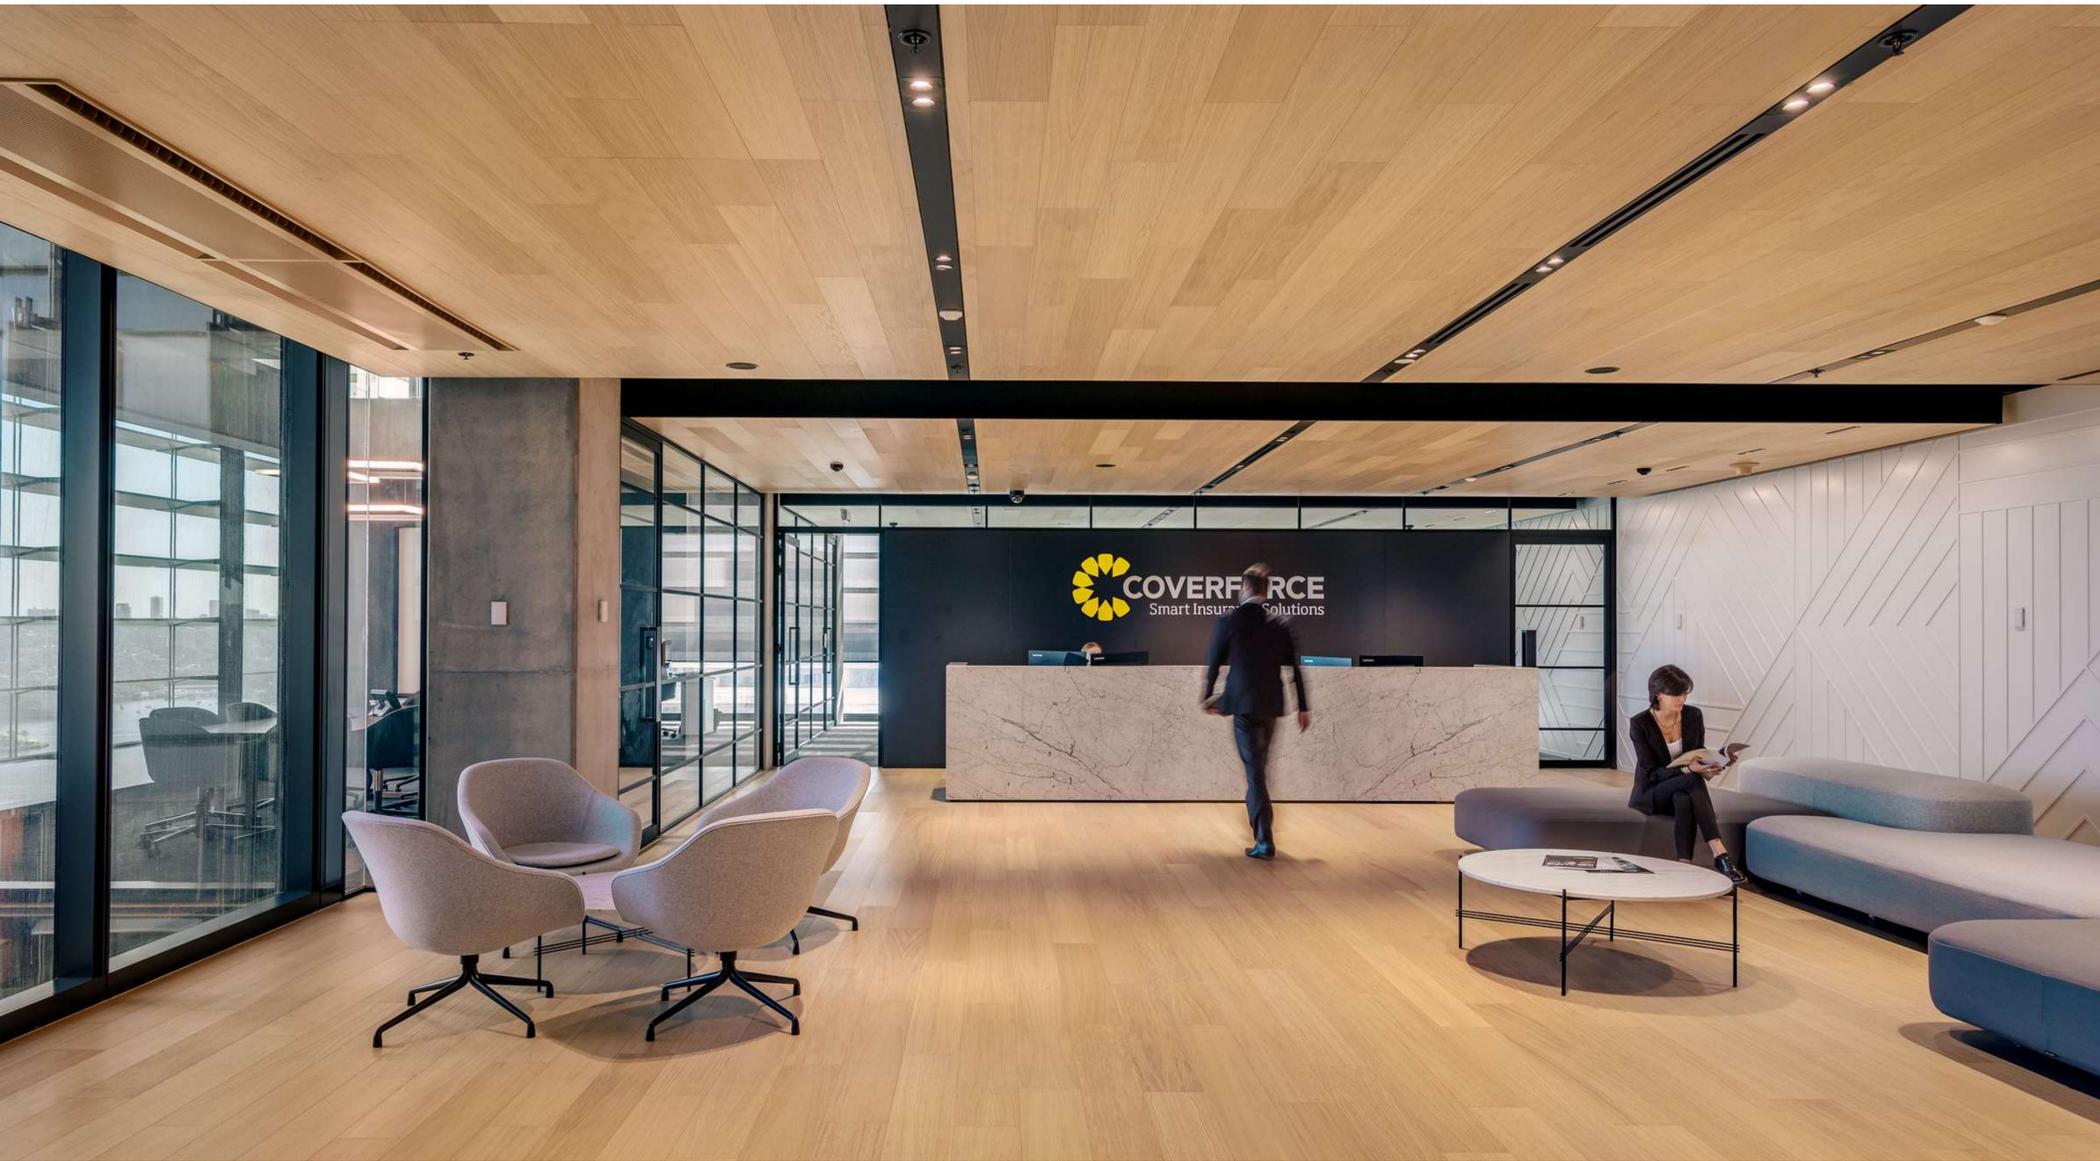

# Parky Summit

DUNE OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

ESSENCE OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

FROZEN WALNUT– ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

MOUNTAIN OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

SILK OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

SKY OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

SMOKED WALNUT – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

STARDUST WALNUT – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013

# Parky Summit

VALLEY OAK – ON ORDER



## Specifications

Top Layer:	0.6mm
Length:	2050mm
Width:	233mm
Thickness:	10mm
Core:	High Density Fibreboard (HDF)
Bevel:	4 Bevels (0.5mm)
Finish:	Super Matt
Commercial Class:	Class 33
Connection System:	Unifit X
Installation Type:	Floating
Fire Class:	Cfl-s1
CE Certification:	EN14342:2013



## MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

RF is a wholesale division based in the UAE and Oman with an extensive portfolio of floors, wall coverings and window treatment solutions. Our products can be applied on a broad range of work from small bespoke projects, through to substantial large-scale developments & masterplans.



RF

Renovation Furniture Trading LLC

e: [rf@rftgulf.com.com](mailto:rf@rftgulf.com.com)

w: [www.rftgulf.com](http://www.rftgulf.com)

t: +91 6678633

a: Injaz Warehouse City, Warehouse 25C, Umm Al Quwain, U.A.E