


RENOVATION FURNITURE TRADING LLC



RAISED ACCESS FLOORING

MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

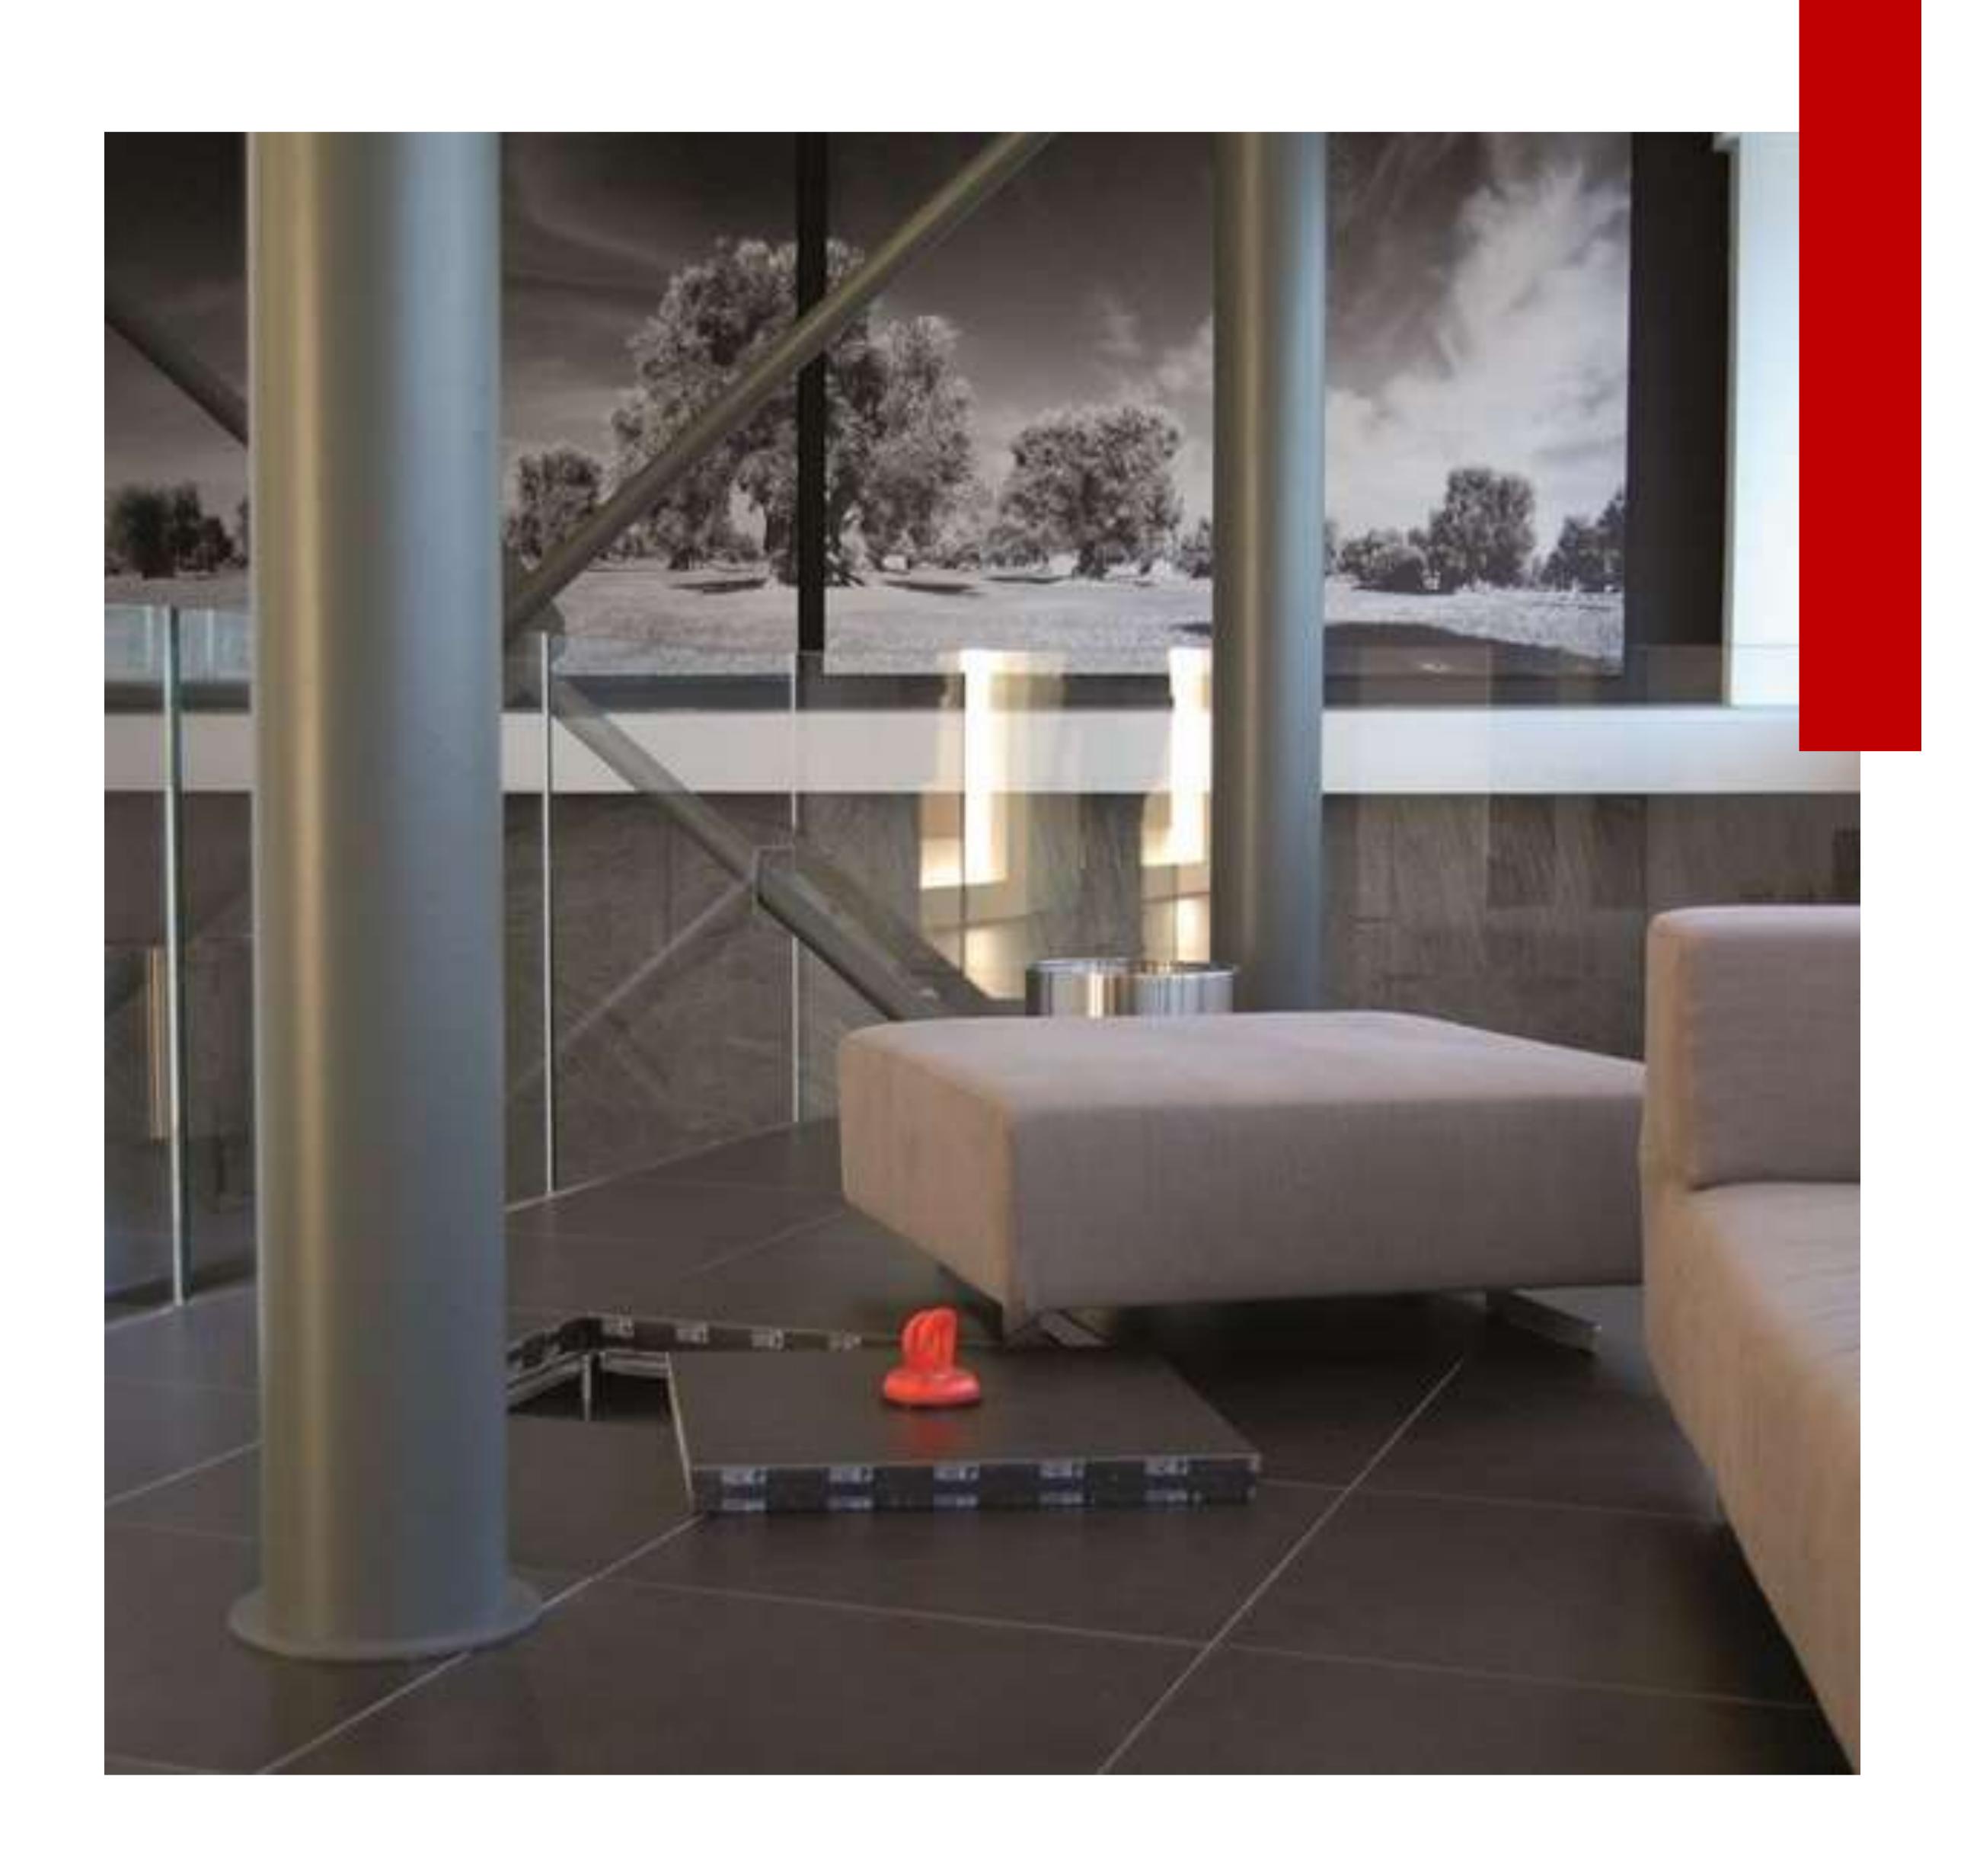









XL PRO RAISED ACCESS FLOORING

XL Pro is a high-quality brand with more than 20 patents for raised access flooring. All products offer full specification and certification for use in commercial buildings, data centers and large retail premises. XL Pro offers complete raised access floor solutions from panels, pedestals, stringers and other accessories to ensure the solution fits the required specification.

XLPROFS800

Steel Cement Bare Finish



Specifications

Product Name: XL Pro FS800 Steel Cement Bare Finish

Quality: FS800

Finish: Bare Finish (Phosphate Coated)

Material 1 Steel: Steel (Cold Roll)

Material 2 Concrete: Concrete Core (Density 1.2 g/m³

Material 3 Coating: Static Epoxy Powder (Anti-Wear/Corrosion)

Panel Size: 600 x 600 x 35mm

Panel Tolerance: +/- 0.25mm

Thickness of Steel Sheet Top: 0.7mm
Thickness of Steel Sheet Top: 0.7mm

Panel Weight: 13 Kg (approx.)

Concentrated Loading: 363 Kg
Ultimate Loading: 11,250N

Uniform Loading: 16,500 N/Sq.M Rolling Loading: 2,950 N

Fire-Proof Performance: Class A

Compression Strength: 13 to 20 MPA





STEEL CEMENT BARE FINISH

Steel Cement HPL Finish



Specifications

Product Name: XL Pro FS800 Steel Cement HPL Finish

Quality: FS800

Finish: HPL Finish (Anti Static HPL/Vinyl)

Anti Static Property: 1.0x10⁶ ~ 1.0x 10⁹ohms

Material 1 Steel: Steel (Cold Roll)

Material 2 Concrete: Concrete Core (Density 1.2 g/m³)

Material 3 Coating: Static Epoxy Powder (Anti-Wear/Corrosion)

Panel Size: 600 x 600 x 35mm

Panel Tolerance: +/- 0.25mm

Panel Weight: 13 Kg (approx.)

Concentrated Loading: 363 Kg Ultimate Loading: 11,250N

Uniform Loading: 16,500 N/Sq.M Rolling Loading: 2,950 N

Fire-Proof Performance: Class A

Compression Strength: 13 to 20 MPA





STEEL CEMENT HPL FINISH

Calcium Sulphate PVC/Vinyl Finish



Specifications

Product Name: XL Pro FS1000 Calcium Sulphate PVC/Vinyl

Quality: FS1000

Top Finish: PVC/Vinyl Finish 2mm

Bottom Finish: Galvanised Steel
Core Material: Calcium Sulphate
Panel Size: 600 x 600 x 32mm

Concentrated Loading: 450 Kg
Ultimate Loading: 13,350 N
Impact Load: 670 N

Uniform Load: 23,000 N/m²
Rolling Load: 3,560 N/ m²

Fire-Proof Performance: Class A

Acoustic Insulation: EN ISO10848-2

Steel Cement Bare Finish



Specifications

Product Name: XL Pro FS800 Steel Cement Bare Finish

Quality: FS1000

Finish: Bare Finish (Phosphate Coated)

Material 1 Steel: Steel (Cold Roll)

Material 2 Concrete: Concrete Core (Density 1.2 g/m³

Material 3 Coating: Static Epoxy Powder (Anti-Wear/Corrosion)

Panel Size: 600 x 600 x 35mm

Panel Tolerance: +/- 0.25mm

Thickness of Steel Sheet Top: 0.7mm
Thickness of Steel Sheet Top: 0.7mm

Panel Weight: 14-15 Kg (approx.)

Concentrated Loading: 453 Kg
Ultimate Loading: 13,350N

Uniform Loading: 23,000 N/Sq.M Rolling Loading: 3,560 N

Fire-Proof Performance: Class A





STEEL CEMENT BARE FINISH












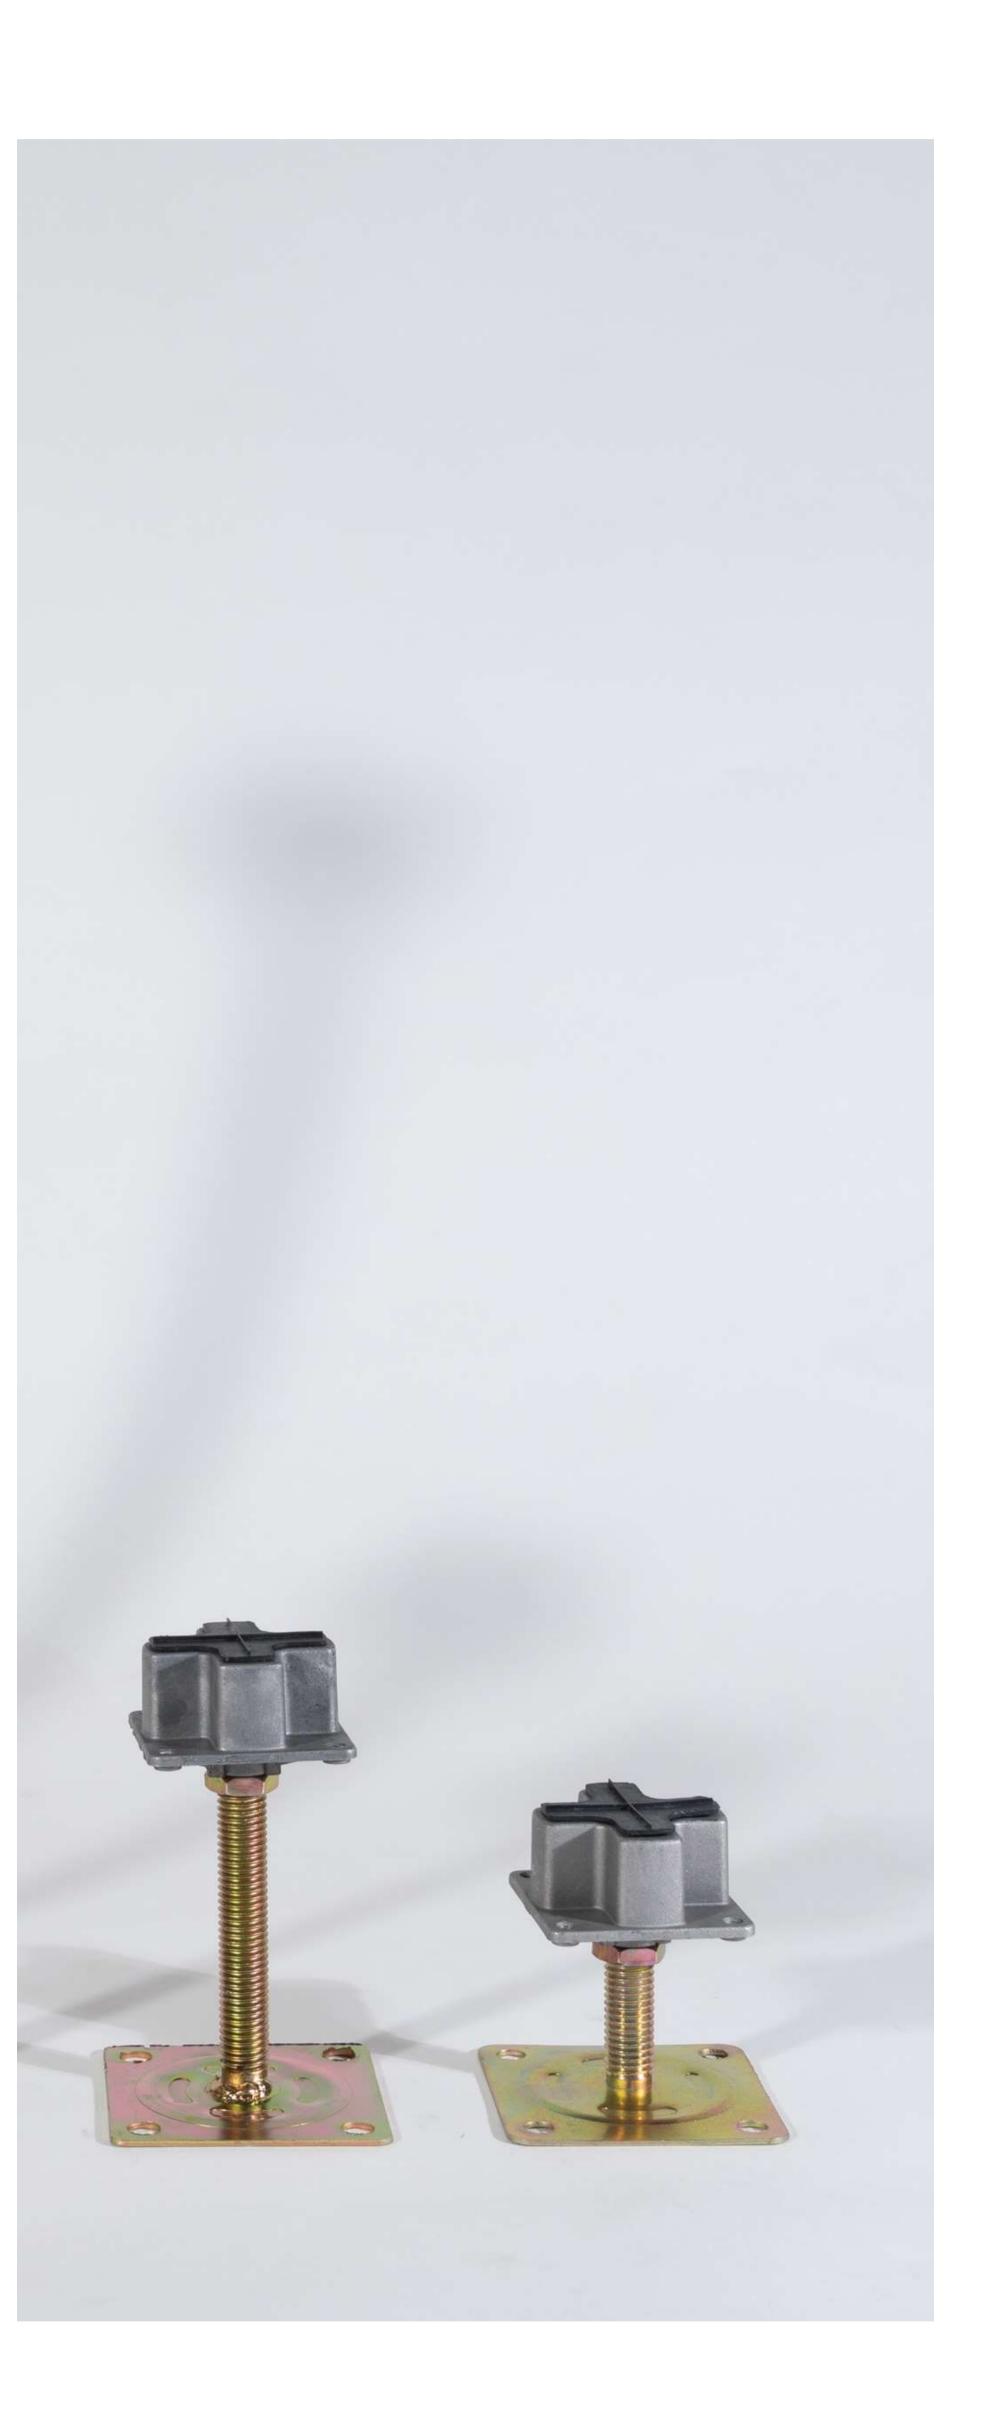


Accessories



SUPPORTING & SUBSIDIARY COMPONENTS

A wide variety of accessories are available for bare finish steel systems including flat head pedestals, cross head pedestals, tube type pedestals, stringers & panel lifters. All of the products are available upon request.

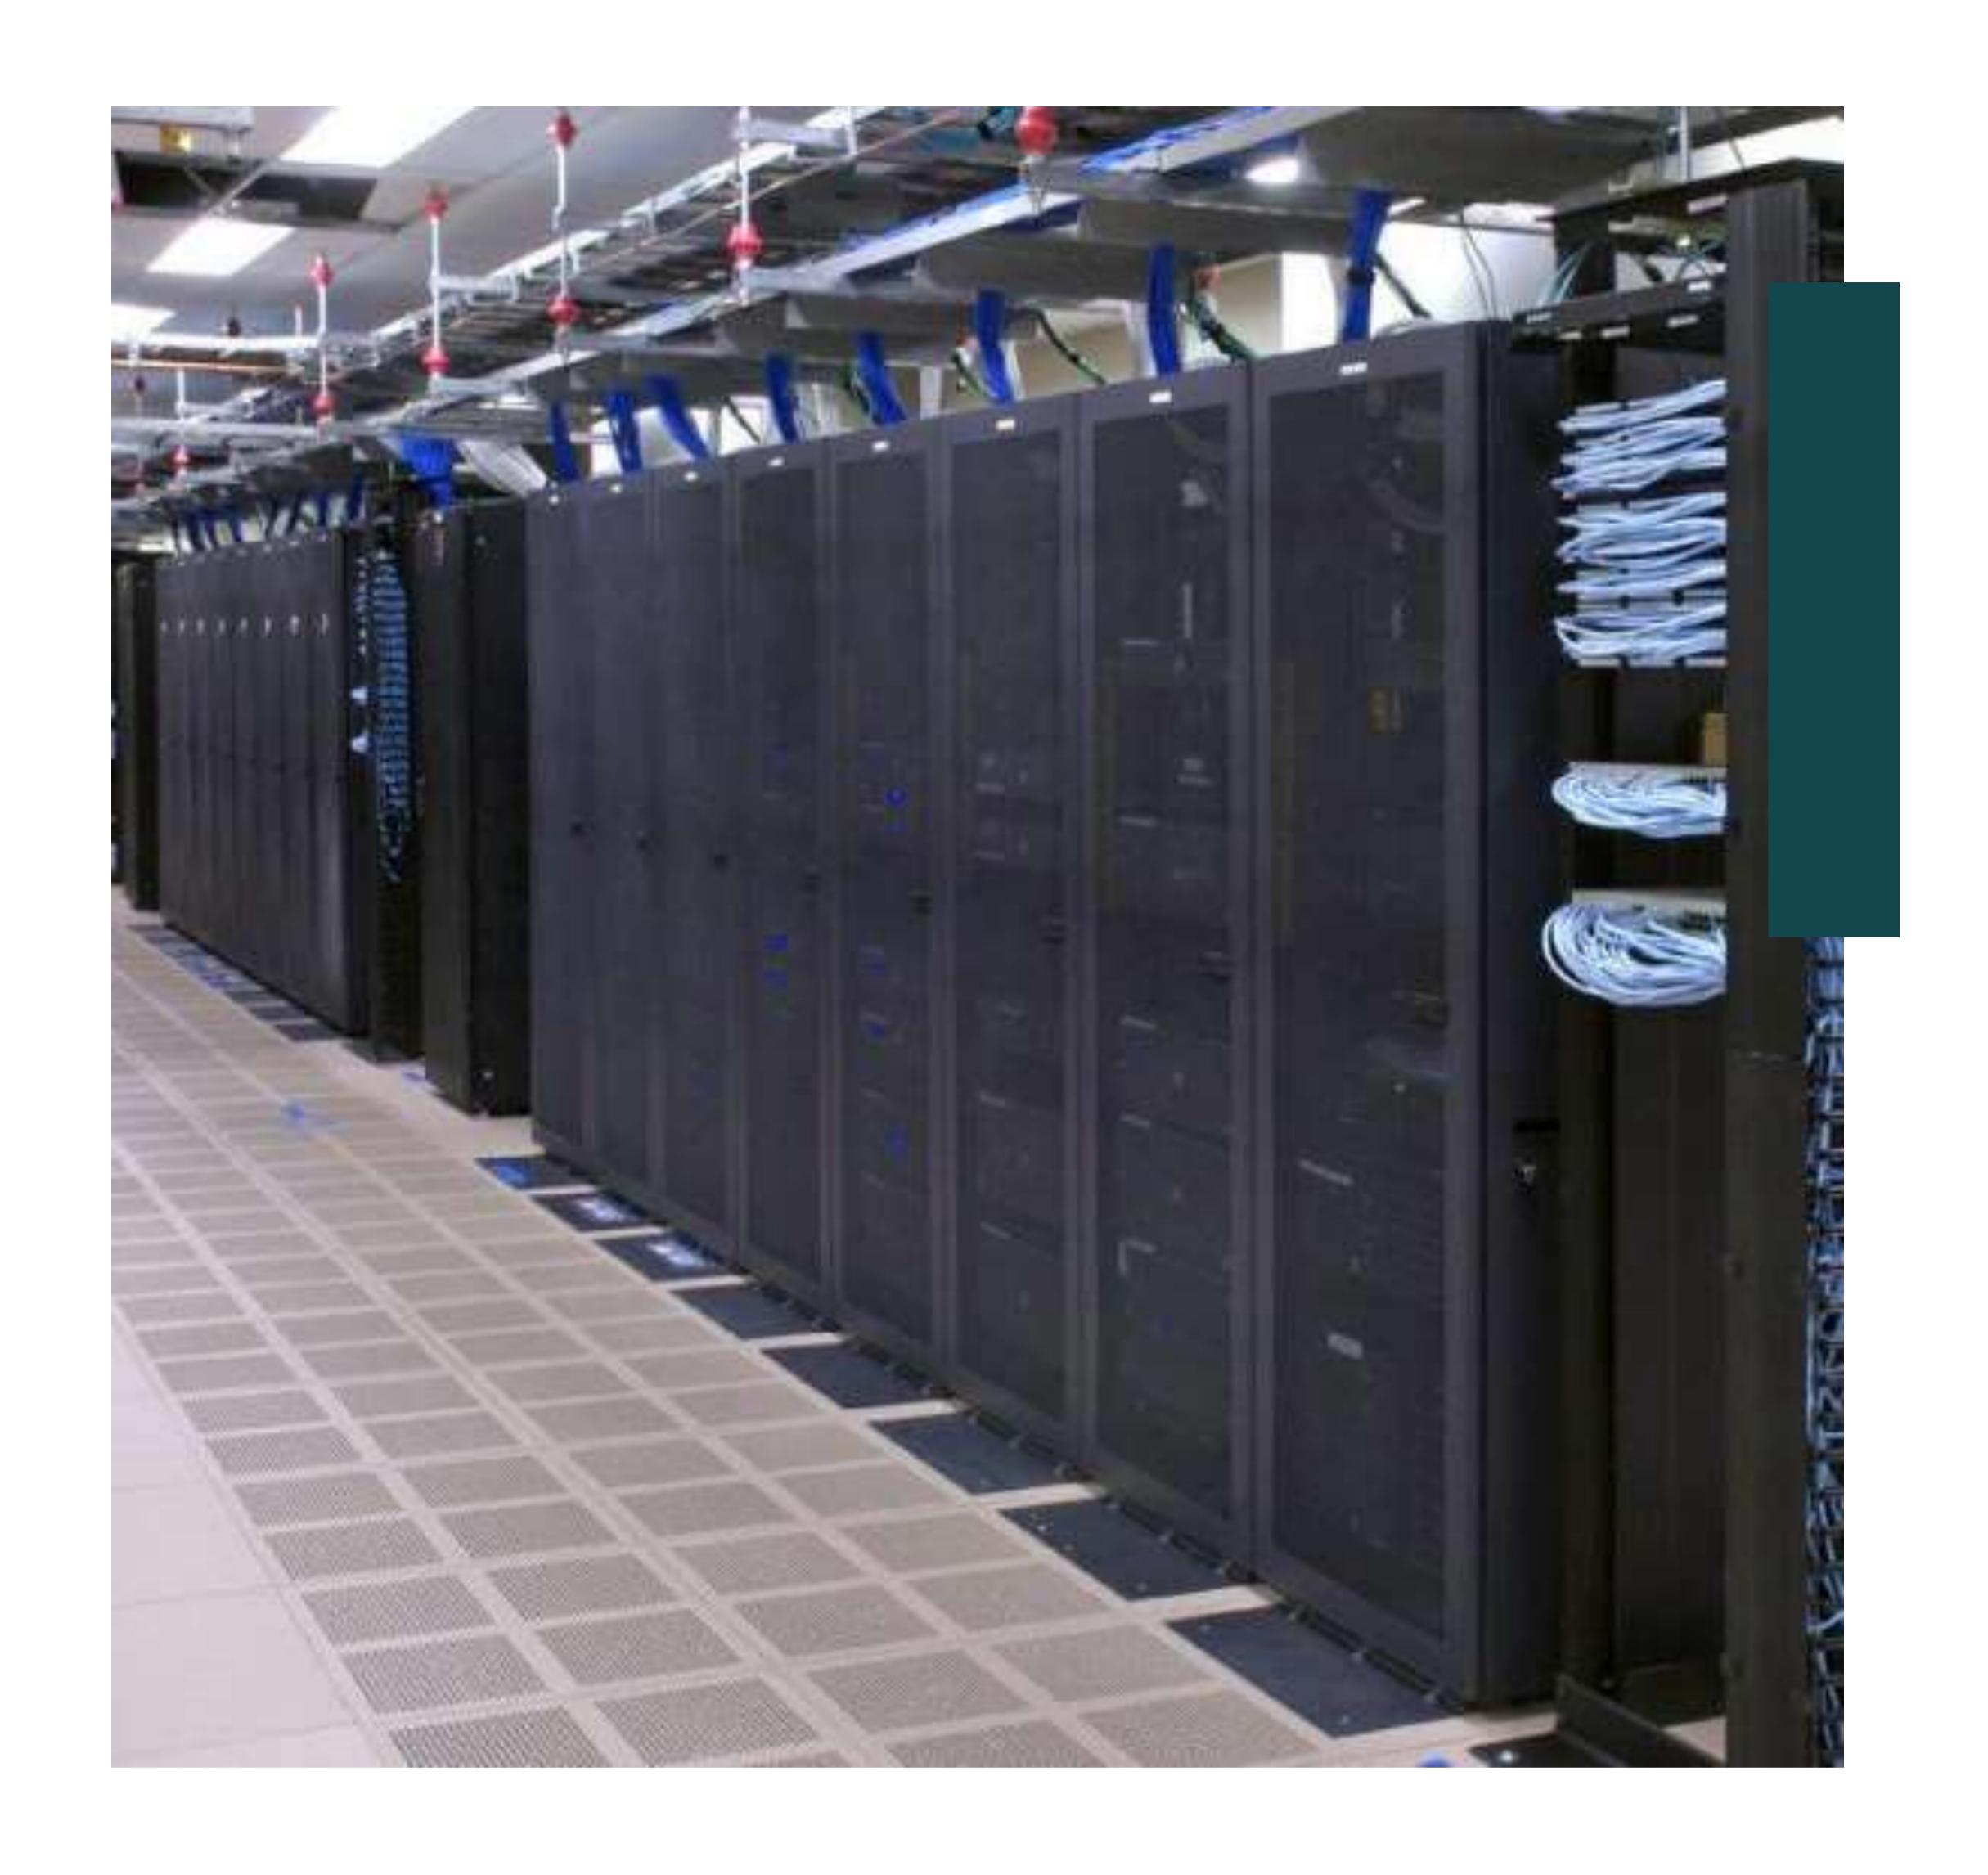

MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

RF is a wholesale division based in the UAE and Oman with an extensive portfolio of floors, wall coverings and window treatment solutions. Our products can be applied on a broad range of work from small bespoke projects, through to substantial large-scale developments & masterplans.



Renovation Furniture Trading LLC

e: rf@rftgulf.com.com

w: www.rftgulf.com

t: +91 6678633

a: Injaz Warehouse City, Warehouse 25C, Umm Al Quwain, U.A.E