




RF

RENOVATION FURNITURE TRADING LLC



RAISED ACCESS FLOORING

MODERN, CLASSICAL & STYLISH
FLOOR, WALL & WINDOW TREATMENTS.

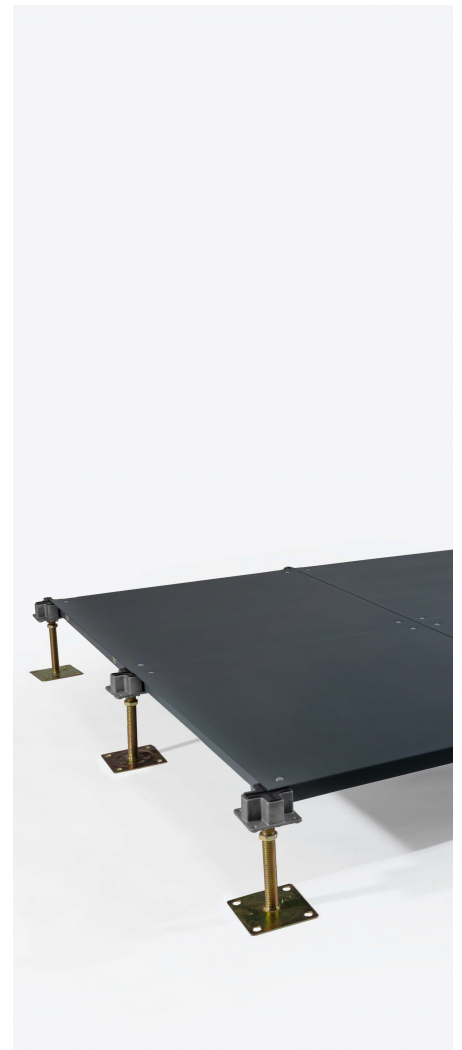

XL PRO RAISED ACCESS FLOORING

XL Pro is a high-quality brand with more than 20 patents for raised access flooring. All products offer full specification and certification for use in commercial buildings, data centers and large retail premises. XL Pro offers complete raised access floor solutions from panels, pedestals, stringers and other accessories to ensure the solution fits the required specification.

XL PRO FS800

Steel Cement Bare Finish



Specifications

Product Name:	XL Pro FS800 Steel Cement Bare Finish
Quality:	FS800
Finish:	Bare Finish (Phosphate Coated)
Material 1 Steel:	Steel (Cold Roll)
Material 2 Concrete:	Concrete Core (Density 1.2 g/m ³)
Material 3 Coating:	Static Epoxy Powder (Anti-Wear/Corrosion)
Panel Size:	600 x 600 x 35mm
Panel Tolerance:	+/- 0.25mm
Thickness of Steel Sheet Top:	0.7mm
Thickness of Steel Sheet Bottom:	0.7mm
Panel Weight:	13 Kg (approx.)
Concentrated Loading:	363 Kg
Ultimate Loading:	11,250N
Uniform Loading:	16,500 N/Sq.M
Rolling Loading:	2,950 N
Fire-Proof Performance:	Class A
Compression Strength:	13 to 20 MPA
Warranty :	10 Years

XL PRO FS800

XL PRO
RAISED ACCESS FLOORING
RENOVATION FURNITURE TRADING LLC



STEEL CEMENT BARE FINISH

XL PRO FS800

Steel Cement HPL Finish



Specifications

Product Name:	XL Pro FS800 Steel Cement HPL Finish
Quality:	FS800
Finish:	HPL Finish (Anti Static HPL/Vinyl)
Anti Static Property:	$1.0 \times 10^6 \sim 1.0 \times 10^9$ ohms
Material 1 Steel:	Steel (Cold Roll)
Material 2 Concrete:	Concrete Core (Density 1.2 g/m^3)
Material 3 Coating:	Static Epoxy Powder (Anti-Wear/Corrosion)
Panel Size:	600 x 600 x 35mm
Panel Tolerance:	+/- 0.25mm
Panel Weight:	13 Kg (approx.)
Concentrated Loading:	363 Kg
Ultimate Loading:	11,250N
Uniform Loading:	16,500 N/Sq.M
Rolling Loading:	2,950 N
Fire-Proof Performance:	Class A
Compression Strength:	13 to 20 MPA
Warranty :	10 Years

XL PRO FS800

XL PRO
RAISED ACCESS FLOORING
RENOVATION FURNITURE TRADING LLC



STEEL CEMENT HPL FINISH

XL PRO FS1000

Calcium Sulphate PVC/Vinyl Finish



Specifications

Product Name:	XL Pro FS1000 Calcium Sulphate PVC/Vinyl
Quality:	FS1000
Top Finish:	PVC/Vinyl Finish 2mm
Bottom Finish:	Galvanised Steel
Core Material:	Calcium Sulphate
Panel Size:	600 x 600 x 32mm
Concentrated Loading:	450 Kg
Ultimate Loading:	13,350 N
Impact Load:	670 N
Uniform Load:	23,000 N/m ²
Rolling Load:	3,560 N/ m ²
Fire-Proof Performance:	Class A
Acoustic Insulation:	EN ISO10848-2
Warranty :	10 Years

XL PRO FS1000

Steel Cement Bare Finish



Specifications



Product Name:	XL Pro FS800 Steel Cement Bare Finish
Quality:	FS1000
Finish:	Bare Finish (Phosphate Coated)
Material 1 Steel:	Steel (Cold Roll)
Material 2 Concrete:	Concrete Core (Density 1.2 g/m ³)
Material 3 Coating:	Static Epoxy Powder (Anti-Wear/Corrosion)
Panel Size:	600 x 600 x 35mm
Panel Tolerance:	+/- 0.25mm
Thickness of Steel Sheet Top:	0.7mm
Thickness of Steel Sheet Bottom:	0.7mm
Panel Weight:	14-15 Kg (approx.)
Concentrated Loading:	453 Kg
Ultimate Loading:	13,350N
Uniform Loading:	23,000 N/Sq.M
Rolling Loading:	3,560 N
Fire-Proof Performance:	Class A
Warranty :	10 Years

XL PRO FS1000

XL PRO
RAISED ACCESS FLOORING
RENOVATION FURNITURE TRADING LLC



STEEL CEMENT BARE FINISH

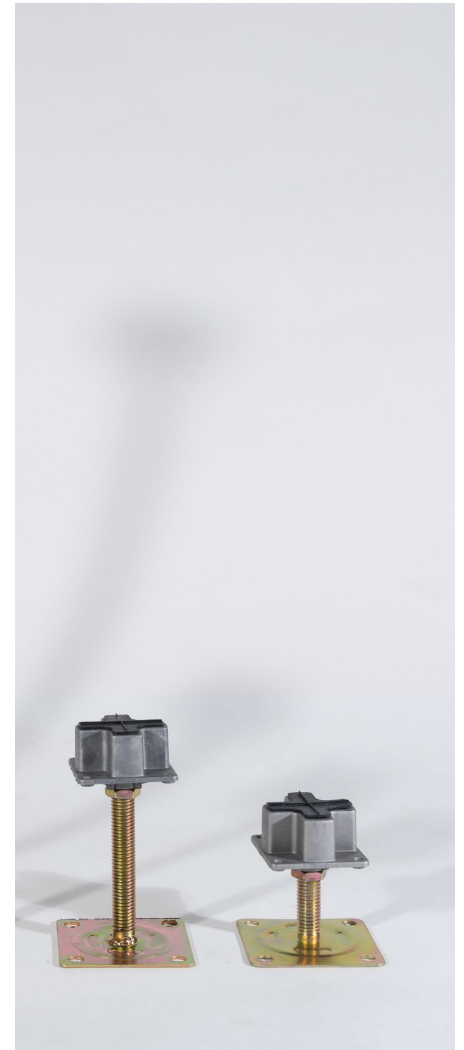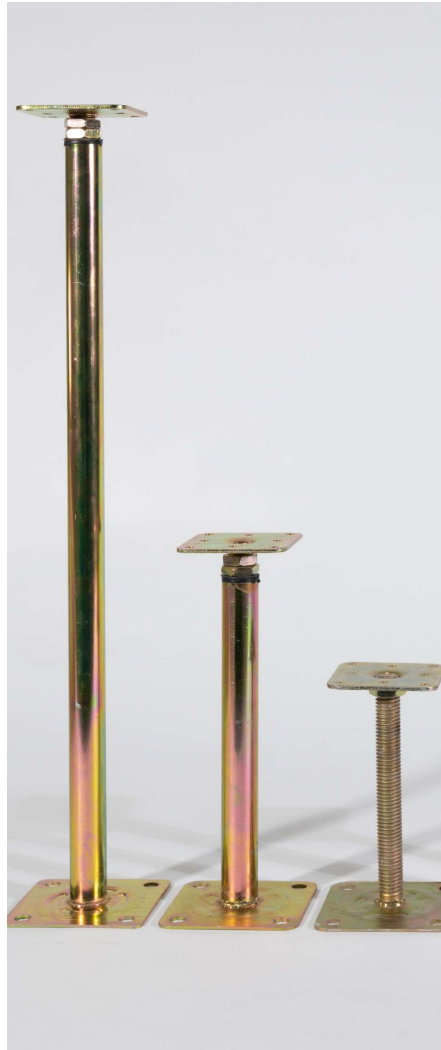

Accessories

XL PRO
RAISED ACCESS FLOORING
RENOVATION FURNITURE TRADING LLC

SUPPORTING & SUBSIDIARY COMPONENTS

A wide variety of accessories are available for bare finish steel systems including flat head pedestals, cross head pedestals, tube type pedestals, stringers & panel lifters. All of the products are available upon request.



MODERN, CLASSICAL & STYLISH FLOOR, WALL & WINDOW TREATMENTS.

RF is a flooring division based in the UAE with an extensive portfolio of floors, wall coverings and window treatment solutions. We offer extensive experience on a broad range of work from small bespoke fit-outs, through to substantial large-scale developments and masterplans



Renovation Furniture Trading LLC

e: rf@rftgulf.com.com

w: www.rftgulf.com

t: +971 66786333